



PROJECT NAME: Carmel Middle School 3 21
CLIENT: Wildcats Flooring

WILDCATS FLOORING

Date: 03/08/2024

SUMMARY OF TAKEOFFS

Type	Mark	Description	Model	QTY	Unit	Detailed QTY	Unit
FLOOR							
Carpet	CART-1	CARPET TILE	MOHAWK / ADAPTABLE 569 CADET (24"X24")	973.00	SF	244.00	PCS
Vinyl	LVT-1	LUXURY VINYL TILE	SHAW CONTRACT / "COMPOUND 5.00 MM" 4077V CHISEL 77520 (24"X24")	1,996.00	SF	499.00	PCS
	SVF-1	SHEET VINYL FLOORING	GERFLOR / TARLAY IMPRESSION 1059 TERRAZZO BRESCIA	576.00	SF	576.00	SF
Tile	CMT1	CERAMIC MOSAIC TILE	DALTILE / KEYSTONES AMERICAN OLEAN / UNGLAZED MOSAICS MOTTLED MEDIUM BROWN D050 (2"X2") 12"x24" Sheet	54.00	SF	27.00	PCS
	CMT2	CERAMIC MOSAIC TILE	DALTILE / KEYSTONES AMERICAN OLEAN / UNGLAZED MOSAICS BROWNBERRY D118 (2"X2") 12"x24" Sheet	9.00	SF	5.00	PCS
	CMT3	CERAMIC MOSAIC TILE	DALTILE / KEYSTONES AMERICAN OLEAN / UNGLAZED MOSAICSNAVY D189 (2"X2") 12"x24" Sheet	32.00	SF	16.00	PCS
Padding	SP1	SAFETY PADDING	*Verify Specs	220.00	SF	220.00	SF
BASE							
Resilient	RB1	RESILIENT BASE	JOHNSONITE TBD ROPPE MATCH JOHNSONITE 6"H	487.00	LF	487.00	LF
	RB2	RESILIENT BASE	JOHNSONITE TBD ROPPE MATCH JOHNSONITE 4"H	842.00	LF	842.00	LF
Ceramic	CMT3	CERAMIC MOSAIC COVE TOE	COVE TOE DAL TILE / KEYSTONES NAVY (2"X2") AMERICAN OLEAN / UNGLAZED MOSAICS MATCH DAL TILE	57.00	LF	57.00	LF
WALL							
Tile	WT1	WALL TILE	*Verify Specs	146.00	SF	146.00	SF
TRANSITIONS							
Transitions	TR1	CART TO RESILIENT	RESILIENT TRANSITION CTA-XX-A	7.00	LF	7.00	LF
	TR2	CMT TO CART	RESILIENT TRANSITION CTA-XX-A	7.00	LF	7.00	LF
	TR2	XCAR TO RESILIENT	RESILIENT TRANSITION CTA-XX-A	39.00	LF	39.00	LF
	TR4	CART TO SP	RESILIENT TRANSITION CTA-XX-A	10.00	LF	10.00	LF

Estimating Notes:

- QTY includes 8% wastage
- Bathroom wall tile is assumed
- CART TO SP is assumed

CARMEL MIDDLE SCHOOL - INTENSE BEHAVIOR SUPPORT PROGRAM (IBSP)



300 SOUTH GUILFORD ROAD
CARMEL, IN 46032



ARCHITECT

FANNING HOWEY

3170848-0966
350 E. NEW YORK ST. SUIT 300, INDIANAPOLIS, IN 46204

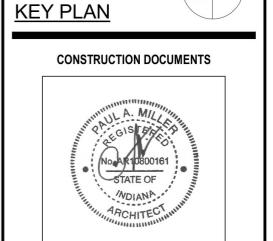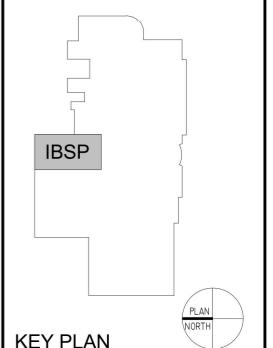

DRAWN BY:	
PROJECT NUMBER:	22009.01
PROJECT ISSUE DATE:	02/15/2024
REV. NO. ▲	DESCRIPTION
	DATE

LIST OF FINISHES AND TRANSITIONS









A8S.01

LIST OF FINISHES

REFER TO A8 ARCH. DWG. SHEETS

FLOOR MATERIALS

REFER TO A8 ARCH. DWG. SHEETS

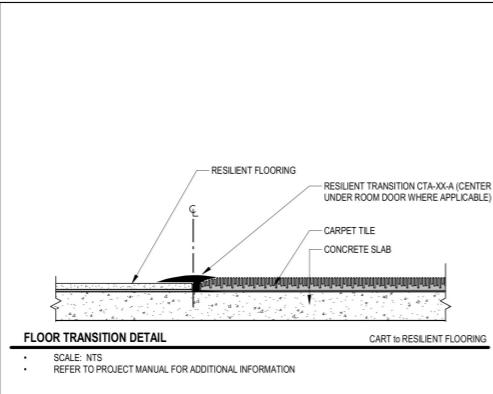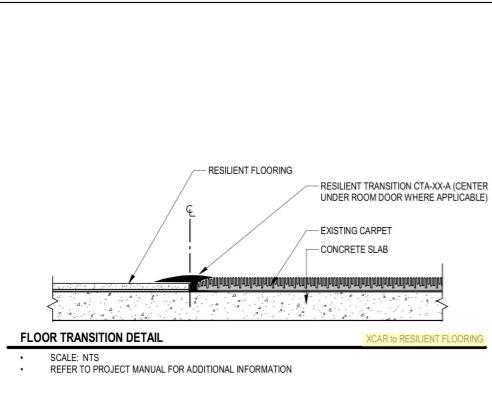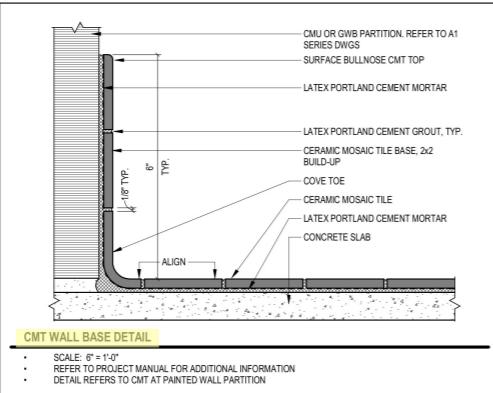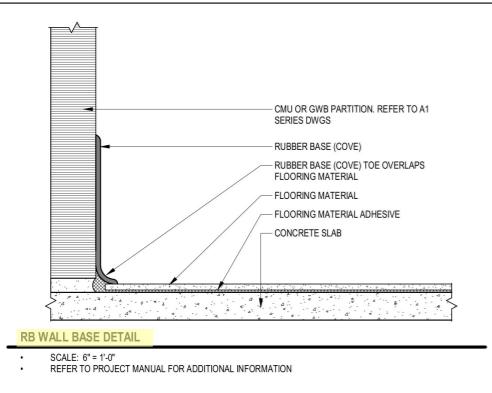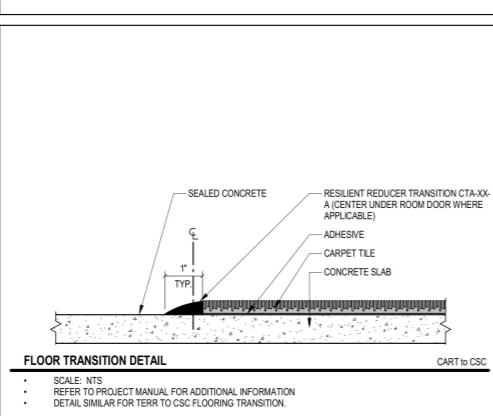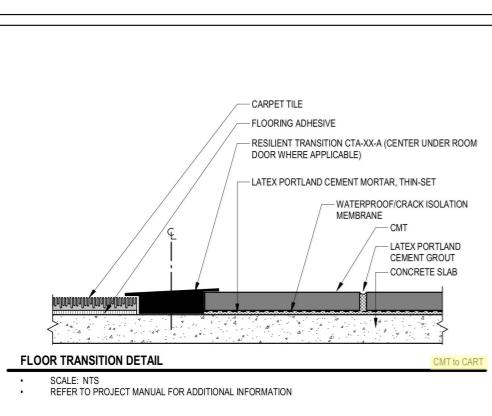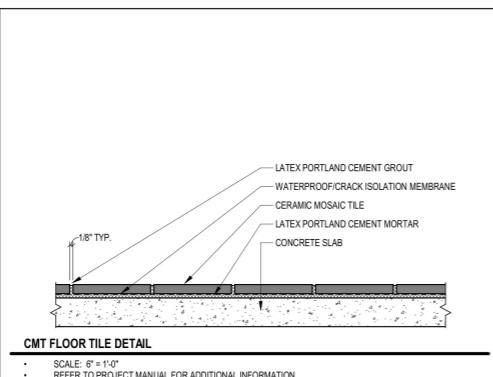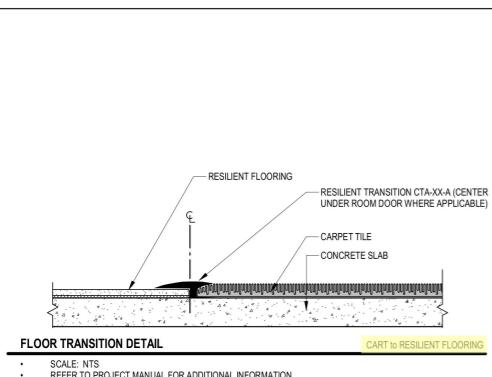

CARPET TILE

MISCELLANEOUS FINISHES

REFER TO A8 ARCH. DWG. SHEETS

INTERIOR WOOD DOORS/ INTERIOR WOOD TRIM

- STAIN ALL WOOD DOORS, WOOD TRIM, ETC. TO MATCH EXISTING.
- WOOD SPECIES TO BE PLAIN SLICED RED OAK.
- PROVIDE WOOD STAIN SAMPLES FOR VERIFICATION.

GROUT

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

GT-1 TBD TBD

RESILIENT MOLDING ACCESSORIES

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

RMA-1 JOHNSONITE MATCH RB-1

SHEET VINYL FLOORING

STUDENT BREAKROOM

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

SVF-1 GERFLOR / TARLAR IMPRESSION 1059 TERRAZZO BRESCIA

LUXURY VINYL TILE

STUDENT BREAKROOM

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

LVT-1 SHAW CONTRACT / "COMPOUND 5.0 MM" 4077V CHISEL 77520 (24"X24")

SAFETY PADDING

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

SP-1 REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION

MATERIAL & FINISH GENERAL NOTES

GENERAL

- REFER TO FINISH PLAN DRAWINGS AND DETAILS (A8 SERIES) FOR MATERIALS, PATTERNS AND COLORS.
- REFER TO A8.01 FOR LIST OF FINISHES.

FLOORING

- ALIGN EDGE OF FINISHED FLOOR MATERIAL WITH EDGE OF WALL OR CASEWORK.
- FLOOR FINISH MATERIAL TRANSITIONS SHALL OCCUR UNDER THE CENTER OF THE DOOR UNLESS OTHERWISE INDICATED, WHERE THE FLOORING MATERIAL CHANGES FROM ROOM TO ROOM.
- EXTEND FLOOR FINISH AND PATTERNS UNDER ALL OPEN TO THE FLOOR CASEWORK AND FURNITURE.
- CONTINUE CONTINUOUS CONCRETE SLAB OVER PLUMBING DRAINS, PLUMBING DRAWINGS, ETC. AT FLOOR PLANS, RESTROOM ENLARGED PLANS, PLUMBING DRAWINGS, ETC. FOR FLOOR DRAIN LOCATIONS.
- AT BUILDING EXPANSION JOINTS (IF APPLICABLE) PROVIDE PRE-FABRICATED MOVEMENT PROFILE SYSTEM IN MORTAR BED. PROVIDE SCHLUTER DILEX-EDP OR APPROVED EQUAL, TYPICAL AT ALL LOCATIONS.

BASE MATERIALS

REFER TO A8 ARCH. DWG. SHEETS

RESILIENT BASE

COVE BASE

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

RB-1 (6TH) JOHNSONITE TBD
RB-2 (4TH) ROPPE JOHNSONITE TBD
RB-3 (4TH) ROPPE MATCH JOHNSONITE

CERAMIC MOSAIC TILE

6TH COVE BASE

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

CMT-3 DALILE / KEYSTONES AMERICAN OLEAN / UNGLAZED MOSAICS NAVY (2X2") MATCH DALILE

CEILING FINISHES

REFER TO A8 ARCH. DWG. SHEETS

ACOUSTICAL CEILING TILE

REFER TO A8 ARCH. DWG. SHEETS

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

ACT-1 (FIELD) ARMSTRONG / SCHOOL ZONE FINE WHITE / 2X2'
ACT-2 (RESTROOMS) ARMSTRONG TUNDRA #301 WHITE / 2X2'

GYPSUM WALLBOARD CEILING AND BULKHEADS

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

GWB REFER TO REFLECTED CEILING PLANS AND PROJECT MANUAL FOR TYPE AND HEIGHT.
GWBB REFER TO REFLECTED CEILING PLANS AND PROJECT MANUAL FOR BULKHEAD TYPE AND HEIGHT.

WALL FINISHES

REFER TO A8 ARCH. DWG. SHEETS

PAINT

MATERIAL ABBREVIATION MATERIAL/MANUFACTURER COLOR SELECTION

P-1 (FIELD) PRO PAINTS PRO PAINTS PRO 11231 OATMEAL
P-2 (DOORFRAMES) PRO PAINTS TO BE DETERMINED PRO 1304 MERLOT
P-3 (RESTROOMS) SHERWIN WILLIAMS TO BE DETERMINED SW704 SNOWBOUND
P-4 (CEILINGS) SHERWIN WILLIAMS TO BE DETERMINED
P-5 (NEUTRAL ACCENT) SHERWIN WILLIAMS TO BE DETERMINED

PAINT TYPE GENERAL NOTES

- UNDER SECTION 099123 - INTERIOR PAINTING, PAINT EXPOSED PIPES, DUCTWORK, BREACHING, CONDUIT, INSULATED PIPES, CONDUIT HANGERS, SUPPORTS, BRACING, ETC., WHICH OCCURS IN SPACES DESIGNATED TO BE PAINTED IN PART OR WHOLE.
- PAINT ALL EXPOSED METAL FRAMES AS INDICATED. METAL FRAMES SHALL BE PAINTED IN PART OR WHOLE.
- ALL GYPSUM BOARD WALLS SHALL BE PAINTED IN PART OR WHOLE.
- ALL GYPSUM BOARD CEILINGS AND SOFFITS SHALL BE PAINTED WITH PAINT TYPE #9.21 (SEMIGLOSS) UNLESS OTHERWISE INDICATED.
- PAINT ALL NON-INTERGRALLY COLORED CMU WALLS WITH INTERIOR PAINT TYPE #14 (SEMIGLOSS), UNLESS OTHERWISE INDICATED.
- IN THE FOLLOWING ROOMS PAINT WITH PAINT CODE #221 (EPOXY SEMI-GLOSS). REFER TO SECTION 09960 - HIGH PERFORMANCE COATINGS.
- ALL FERROUS METAL (EXISTING STRUCTURE) SHALL BE PAINTED INTERIOR PAINT TYPE #5.12.
- ALL GALVANIZED METAL (EXISTING STRUCTURE) SHALL BE PAINTED INTERIOR PAINT TYPE #5.32.
- ALL EXPOSED METAL (EXISTING STRUCTURE) SHALL BE PAINTED INTERIOR PAINT TYPE #5.31.
- ALL EXPOSED GALVANIZED-METAL STRUCTURE SHALL BE PAINTED INTERIOR PAINT TYPE #5.31.
- ALL WALLS ARE TO RECEIVE A SEMI-GLOSS FINISH AND ALL CEILINGS/BULKHEADS ARE TO RECEIVE A FLAT FINISH.

PAINT COLOR GENERAL NOTES

- ALL INTERIOR WALLS SHALL BE PAINTED P-1 UNLESS OTHERWISE INDICATED ON FINISH PLANS OR INTERIOR ELEVATIONS.
- PAINT ALL GYB SOFFITS P-3 UNLESS OTHERWISE NOTED ON FINISH PLANS OR INTERIOR ELEVATIONS.
- PAINT ALL SIDES (HORIZ. AND VERT.) OF SOFFIT INDICATED COLOR, UNLESS OTHERWISE NOTED.
- PAINT ALL PAINTED EXPOSED CEILINGS AND GYPSUM BOARD CEILINGS P-3 UNLESS OTHERWISE NOTED ON FINISH PLANS, CEILING PLANS, OR INTERIOR ELEVATIONS.
- ALL EXISTING INTERIOR HOLLOW METAL FRAMES AND DOOR FRAMES TO REMAIN UNLESS OTHERWISE NOTED.
- PAINT ALL EXPOSED STEEL COLUMNS TO MATCH ADJACENT WALL COLOR. PAINT ALL FACES (PAINT CODE #5.12).
- ALL EXPOSED STEEL COLUMNS SHALL BE PAINTED TO MATCH ADJACENT WALL COLOR, UNLESS OTHERWISE INDICATED ON INTERIOR ELEVATIONS OR FINISH PLANS.
- STAIN ALL NEW WOOD TRIM RAILS/DOORS ETC. TO MATCH EXISTING.


4 513 CASEWORK ELEVATION - EAST

SCALE: 1/4" = 1'-0"

CASEWORK SCHEDULE					
TYPE	NO.	SIZE	DESCRIPTION		
		W D H			
TO	15	2'-6" 2'-0" 7'-0"	OPEN TALL UNIT WITH FIVE ADJUSTABLE SHELVES.		
TT	16	4'-0" 2'-0" 7'-0"	TOTE TRAY UNIT WITH TWO VERTICAL DIVIDERS TWO HINGED DOORS AND 57 TRAYS - 14 INCHES WIDE X 3-1/2 INCHES HIGH X 19 INCHES DEEP		
TO	17	3'-0" 2'-0" 7'-0"	OPEN TALL UNIT WITH FIVE ADJUSTABLE SHELVES.		
I	54	4'-0" 2'-0" 7'-0"	TALL UNIT WITH FOUR ADJUSTABLE SHELVES AND TWO HINGED DOORS.		

5 513 - CASEWORK ELEVATION - WEST

SCALE: 1/4" = 1'-0"

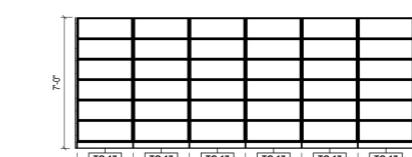

CARMEL MIDDLE SCHOOL - INTENSE BEHAVIOR SUPPORT PROGRAM (IBSP)


300 SOUTH GUILFORD ROAD
CARMEL, IN 46032




FANNING HOWEY

3170848-0966 WWW.FH.COM

350 E. NEW YORK ST. SUIT 300, INDIANAPOLIS, IN 46204

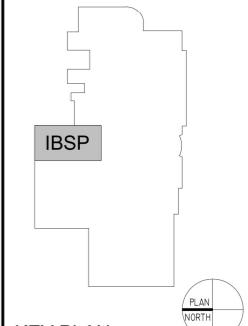

KEY PLAN



DRAWN BY: HRS
PROJECT ISSUE DATE: 02/15/2024

REV. NO. ▲ DESCRIPTION DATE



UNIT A - FIRST FLOOR FLOOR FINISH PLAN

A8.01

GENERAL FINISH NOTES			
A.	REFER TO LIST OF FINISHES FOR COLOR SELECTION.		
B.	ALL FIXED CASEWORK, TACKBOARDS AND MARKERBOARDS SHALL BE REMOVED UNLESS OTHERWISE NOTED. NEW FINISHES SHALL BE INSTALLED AROUND THESE ITEMS. THIS INCLUDES NEW FINISHES BETWEEN BASE AND WALL CABINETS AND WITHIN KNEE SPACES.		
C.	EXISTING COMPUTER COUNTERTOP ASSEMBLY TO REMAIN, UNLESS NOTED OTHERWISE. CUT CARPET AROUND COUNTERTOP SUPPORTS AND POWER CABLES.		
D.	EXISTING INTERIOR SIGNAGE TO BE REINSTALLED AFTER FINAL FINISH INSTALLATION.		
E.	SEALANT SHALL BE APPLIED AT ALL MATERIAL TRANSITIONS, COUNTERS, BACKSPASHES, AND DOORS AND TRIM.		
F.	PROVIDE NEW RESILIENT TRANSITION STRIPS AT EXPOSED EDGE OF NEW FLOOR FINISHES TO EXISTING FLOOR FINISHES.		
G.	FINISHES WITH "X" PREFIX INDICATE EXISTING FINISH TO REMAIN.		
H.	CONTINUE NEW FLOOR FINISH, BASE AND WALL MATERIAL AS REQUIRED IN KNEE SPACES.		
I.	RELOCATE EXISTING DEVICE FACEPLATES, SWITCH FACEPLATES, TECHNOLOGY FACEPLATES, AND CLOCKS.		
J.	EXISTING ITEMS TO REMAIN AND NEW FINISHES APPLIED AROUND INCLUDE BUT NOT LIMITED TO THERMOSTATS, AND FIRE EXTINGUISHER CABINETS (UNO).		
K.	PATCH AND REPAIR ALL HOLES AND IMPERFECTIONS, TO RECEIVE NEW FINISHES.		

EQUIPMENT GENERAL NOTES




A.	HIDDEN LINES INDICATE ITEMS TO BE PART OF LOADING EQUIPMENT PACKAGE PROVIDED BUT NOT INCLUDED IN CONSTRUCTION CONTRACTS. DASHED LINES (—) INDICATE OVERHEAD ITEMS INCLUDED IN CONSTRUCTION CONTRACTS.
B.	INDICATE LENGTH OF HIGH TACK BOARD LENGTH AS INDICATED. REFER TO MOUNTING HEIGHT DRAWING.
C.	XTB INDICATES EXISTING TACK BOARDS TO REMOVE.
D.	PROVIDE FILLER STRIPS BETWEEN CASEWORK UNITS AND WALL AS NEEDED TO MATCH EXISTING COUNTER TO FACE OF WALL OR ADJACENT TAUL CABINET. ALL EXPOSED ENDS AND BACKS OF CASEWORK SHALL BE FINISHED.
E.	CASEWORK INSTALLER SHALL CUT CASEWORK AS REQUIRED FOR PLUMBING/ELECTRICAL LINES.
F.	CASEWORK INSTALLER SHALL CAULK BETWEEN COUNTERS, BACKSPASHES, AND WALLS.
G.	ALL EXPOSED ENDS OF CASEWORK SHALL BE MOUNTED AT 7'-0" AFF UNLESS OTHERWISE NOTED.
H.	REFER TO LIST OF FINISHES FOR COLOR SELECTION. EXISTING INTERIOR SIGNAGE TO BE REINSTALLED AFTER FINISH INSTALLATION.
I.	INTERIOR PANEL SIGNAGE TO BE PROVIDED BY ALLOWANCE.

FLOOR FINISH GENERAL NOTES

A.	FLOORING FINISH MATERIAL TRANSITIONS SHALL OCCUR UNDER THE CENTER OF THE DOOR UNLESS OTHERWISE NOTED.
B.	ALIGN EDGE OF FINISHED FLOOR MATERIAL WITH EDGE OF WALL OR CASEWORK.
C.	TYPICAL CLASSROOM CEILING HEIGHT IS 9'-0".
D.	TYPICAL CORRIDOR CEILING HEIGHT IS 8'-0".
E.	PAINT ALL SIDES (VERT. AND HORIZ.) OF SOFFIT P-4, UNLESS OTHERWISE NOTED.
F.	PARTIAL EXPOSED INTERIOR STEEL COLUMNS TO MATCH ADJACENT WALL COLOR, UNLESS OTHERWISE NOTED.
G.	ALL INTERIOR HOLLOW METAL FRAMES AND DOOR FRAMES TO BE PAINTED WHITE.
H.	PAINT ALL NEW INTERIOR DOOR FRAMES P-2 TO MATCH EXISTING DOOR FRAME COLOR. PAINT ON ALL FACES (PAINT CODE #512).
I.	PAINT ONE MOCKUP AREA TO RECEIVE ARCHITECT'S APPROVAL BEFORE ORDERING PAINT FOR ENTIRE BUILDING.

FLOOR PATTERN/FINISH KEY NOTES

- 1 NO WORK IN THIS AREA
- 2 RELOCATE DEMOLISHED MARKERBOARD/TACKBOARD.
- 3 ALIGN CARPET PATTERN TRANSITION WITH INDICATED CORNER.
- 4 REFER TO DETAIL 24A-01 FOR TILE PATTERN.
- 5 REFER TO DOORWAY BETWEEN A509 & A606 FOR DIMENSIONS OF FLOORING PATCH.
- 6 ALIGN NEW FLOORING WITH EDGE OF WALL AND EXISTING FLOORING AS SHOWN WITH HATCH TO MINIMIZE PATCHES.
- 7 RELOCATED EXISTING WALL MOUNTED PROJECTION SCREEN, CENTER ON MARKERBOARD.
- 8 WALL-MOUNTED MANUAL PROJECTION SCREEN: B.O.D. DRAPER LUMA 2 NTSC FORMAT 10' DIAGONAL SCREEN WITH 6' EXTENSION MOUNTING BRACKET.

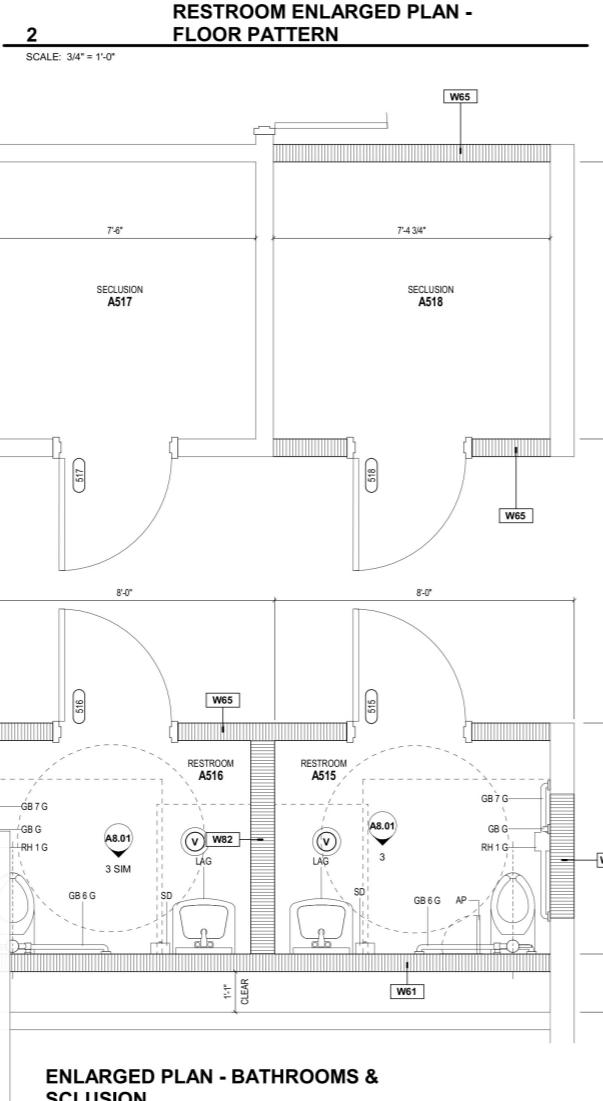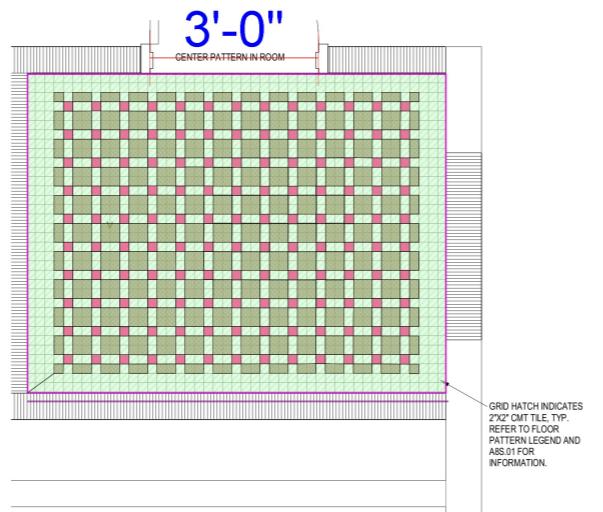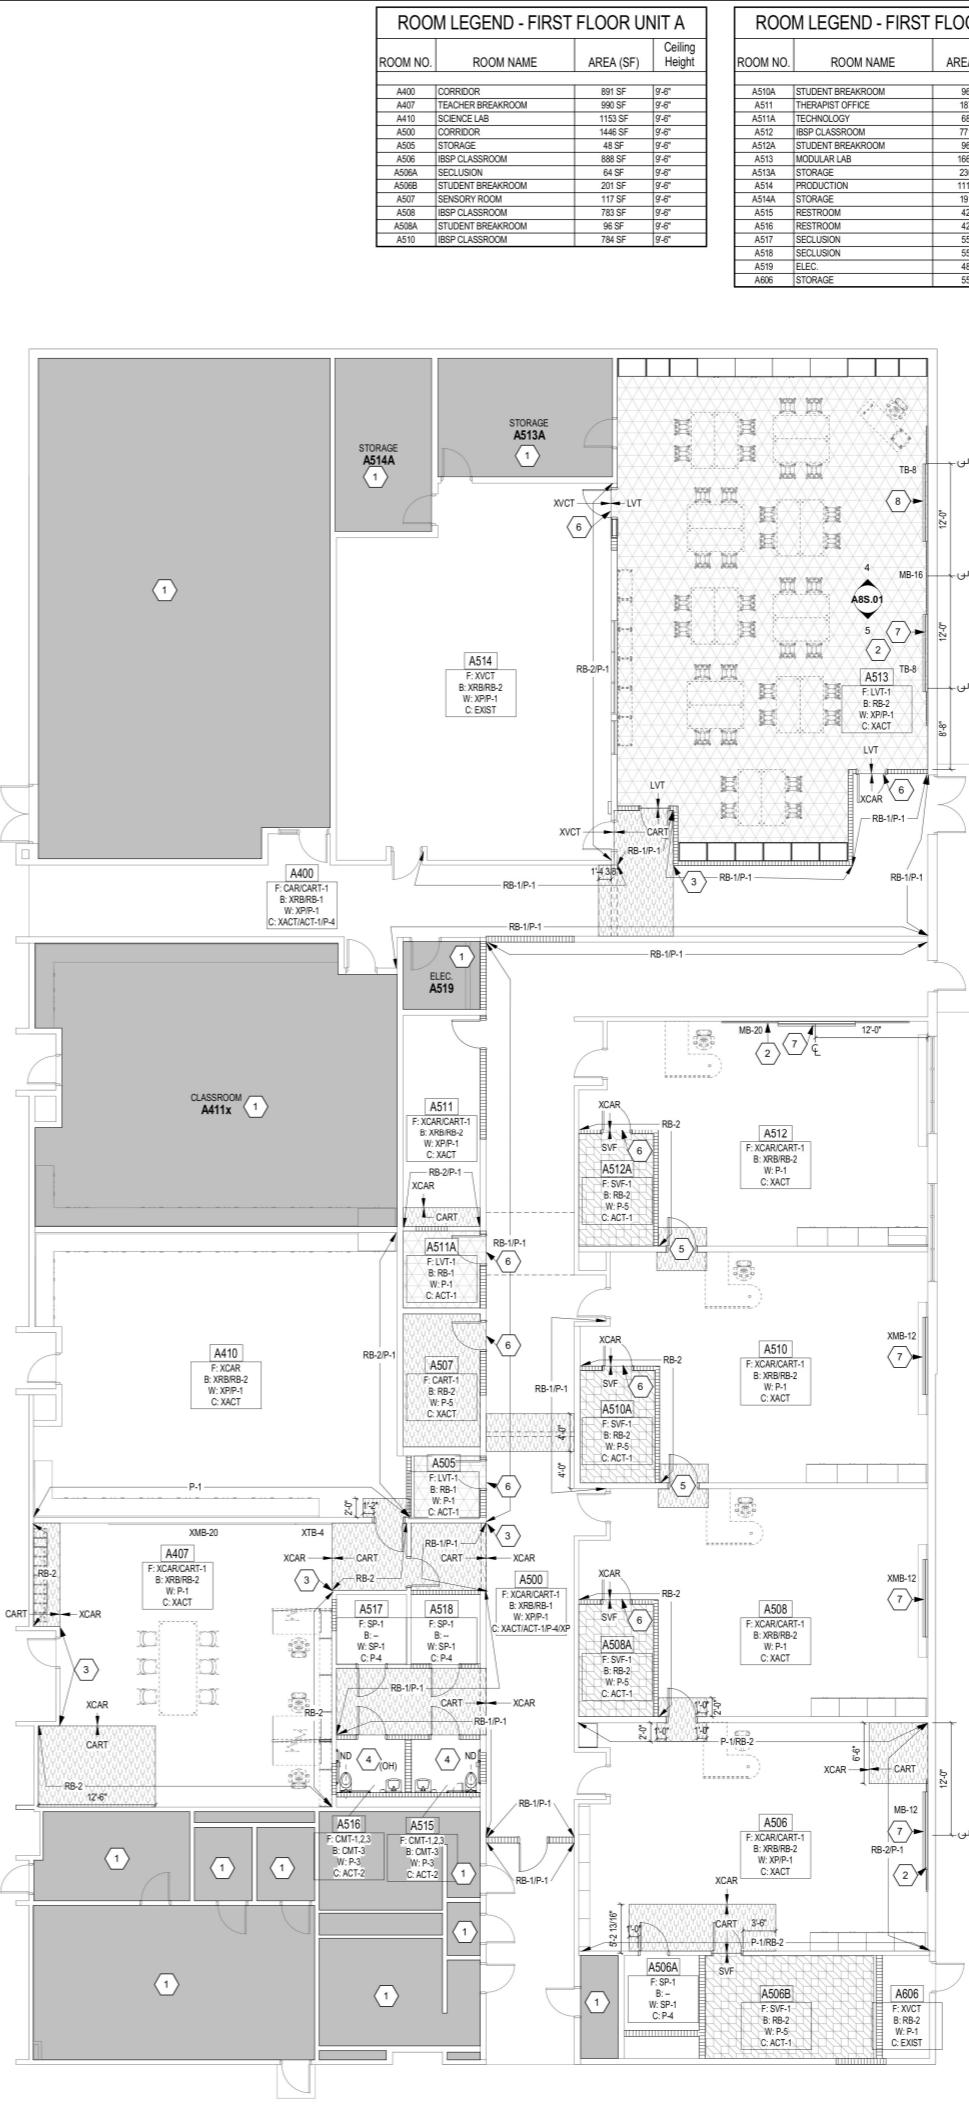

CARMEL MIDDLE SCHOOL - INTENSE BEHAVIOR SUPPORT PROGRAM (IBSP)

300 SOUTH GUILFORD ROAD
CARMEL, IN 46032


CARMEL CLAY SCHOOLS




FANNING HOWEY

3170848-0966 WWW.FHACOM

350 E. NEW YORK ST. SUIT 300, INDIANAPOLIS, IN 46204

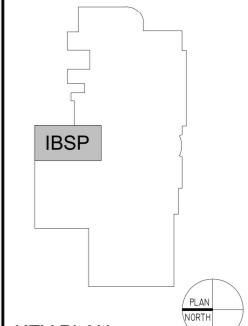

KEY PLAN



DRAWN BY: HRS
PROJECT ISSUE DATE: 02/15/2024

REV. NO. ▲ DESCRIPTION DATE



UNIT A - FIRST FLOOR FLOOR FINISH PLAN

A8.01

GENERAL FINISH NOTES			
ITEM	NOTES	DESCRIPTION	NOTES
A	REFER TO LIST OF FINISHES FOR COLOR SELECTION.		
B	ALL FIXED CASEWORK, TACKBOARD AND MARKERBOARD SHALL BE REMOVED UNLESS OTHERWISE NOTED. NEW FINISHES SHALL BE INSTALLED AROUND THESE ITEMS. THIS INCLUDES NEW FINISHES BETWEEN BASE AND WALL CABINETS AND WITHIN KNEE SPACES.		
C	EXISTING COMPUTER COUNTERTOP ASSEMBLY TO REMAIN, UNLESS NOTED OTHERWISE. CUT CARPET AROUND COUNTERTOP SUPPORTS AND POWER CABLES.		
D	EXISTING INTERIOR SIGNAGE TO BE REINSTALLED AFTER FINAL FINISH INSTALLATION.		
E	SEALANT SHALL BE APPLIED AT ALL MATERIAL TRANSITIONS: COUNTERTOPS, BACKSPASHES, AND DOORS AND CABINETS.		
F	PROVIDE NEW RESILIENT TRANSITION STRIPS AT EXPOSED EDGE OF NEW FLOOR FINISHES TO EXISTING FLOOR FINISHES.		
G	FINISHES WITH "X" PREFIX INDICATE EXISTING FINISH TO REMAIN.		
H	CONTINUE NEW FLOOR FINISH, BASE AND WALL MATERIAL AS REQUIRED IN KNEE SPACES.		
I	RELOCATE AND INSTALL EXISTING DEVICE FACEPLATES, SWITCH FACEPLATES, TECHNOLOGY FACEPLATES, AND CLOCK.		
J	EXISTING ITEMS TO REMAIN AND NEW FINISHES APPLIED AROUND INCLUDE BUT NOT LIMITED TO THERMOSTATS, AND FIRE EXTINGUISHER CABINETS (UNO).		
K	PATCH AND REPAIR ALL HOLES AND IMPERFECTIONS, TO RECEIVE NEW FINISHES.		

EQUIPMENT GENERAL NOTES

A	HIDDEN LINES INDICATE ITEMS TO BE PART OF LONG-TERM EQUIPMENT PACKAGE PROVIDED BUT NOT INCLUDED IN CONSTRUCTION CONTRACTS. DASHED LINES (—) INDICATE OVERHEAD ITEMS INCLUDED IN CONSTRUCTION CONTRACTS.
B	INDICATE LENGTH OF HIGH TACK BOARD LENGTH AS INDICATED. REFER TO MOUNTING HEIGHT DRAWING.
C	INDICATES EXISTING TACK BOARDS TO REMOVE.
D	PROVIDE FILLER STRIPS BETWEEN CASEWORK UNITS AND WALL AS REQUIRED. FILLER STRIPS SHALL EXEND COUNTER TO FACE OF WALL OR ADJACENT TALL CABINET.
E	ALL EXPOSED ENDS AND BACKS OF CASEWORK SHALL BE FINISHED.
F	CASEWORK INSTALLER SHALL CUT CASEWORK AS REQUIRED FOR PLUMBING/ELECTRICAL LINES.
G	CASEWORK INSTALLER SHALL CAULK BETWEEN COUNTERS, BACKSPASHES, AND WALLS.
H	ALL EXPOSED STEEL COLUMNS SHALL BE PAINTED WITH THE TOP AT 7'-0" AFF UNLESS OTHERWISE NOTED.
I	REFER TO LIST OF FINISHES FOR COLOR SELECTION. EXISTING INTERIOR SIGNAGE TO BE REINSTALLED AFTER FINISH INSTALLATION.
J	INTERIOR PANEL SIGNAGE TO BE PROVIDED BY ALLOWANCE.

FLOOR FINISH GENERAL NOTES

A	FLOORING FINISH MATERIAL TRANSITIONS SHALL OCCUR UNDER THE CENTER OF THE DOOR UNLESS OTHERWISE NOTED.
B	ALIGN EDGE OF FINISHED FLOOR MATERIAL WITH EDGE OF WALL OR CASEWORK.
C	TYPICAL CLASSROOM CEILING HEIGHT IS 9'-0".
D	TYPICAL CORRIDOR CEILING HEIGHT IS 8'-0".
E	PAINT ALL SIDES (VERT. AND HORIZ.) OF SOFFIT P-4, UNLESS OTHERWISE NOTED.
F	PARTIAL EXPOSED INTERIOR STEEL COLUMNS TO MATCH ADJACENT WALL COLOR, UNLESS OTHERWISE NOTED.
G	ALL INTERIOR HOLLOW METAL FRAMES AND DOOR FRAMES SHALL BE PAINTED WHITE.
H	PAINT ALL NEW INTERIOR DOORFRAMES P-2 TO MATCH EXISTING DOOR FRAME COLOR. PAINT ON ALL FACES (PAINT CODE #512).
I	PAINT ONE MOCKUP AREA TO RECEIVE ARCHITECT'S APPROVAL BEFORE ORDERING PAINT FOR ENTIRE BUILDING.

FLOOR PATTERN/FINISH KEY NOTES

- NO WORK IN THIS AREA
- RELOCATE DEMOLISHED MARKERBOARD/TACKBOARD.
- ALIGN CARPET PATTERN TRANSITION WITH INDICATED CORNER.
- REFER TO DETAIL 24A-01 FOR TILE PATTERN.
- REFER TO DOORWAY BETWEEN A509 & A606 FOR DIMENSIONS OF FLOORING PATCH.
- ALIGN NEW FLOORING WITH EDGE OF WALL AND EXISTING FLOORING AS SHOWN WITH HATCH TO MINIMIZE PATCHES.
- RELOCATED EXISTING WALL MOUNTED PROJECTION SCREEN, CENTER ON MARKERBOARD.
- WALL-MOUNTED MANUAL PROJECTION SCREEN: B.O.D IS DRAPER LUMA 2 NTSC FORMAT 10' DIAGONAL SCREEN WITH 6' EXTENSION MOUNTING BRACKET.

